

VTH5222CH-S1

2-Wire IP Indoor Monitor



Features

- 7" TFT Capacitive touch screen
- IPC surveillance(VTNS1006A-2 needed)
- Alarm integration
- Micro SD card optional, max 32GB
- Record & Snapshot(SD card needed)



Technical Specification

Model	VTH5222CH-S1
-------	--------------

System

Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS

Video

Video Compression	H.264
-------------------	-------

Audio

Audio Compression	G.711
Audio Input	All-direction Microphone
Audio Output	Built-in Loudspeaker
Bidirectional Talk	Support Dual-way Bidirectional talk

Display

LCD Screen	7" 800x480
------------	------------

Operation Mode

Input	Touch buttons and capacitive screen
-------	-------------------------------------

Interface

Alarm In	6
Alarm Out	1
RS485	1

Network

Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP

General

Memory Slot	Micro SD, Max 32GB
-------------	--------------------

Installation

Surface

Power

Supply directly by VTNS1006A-2

Power Consumption

Work ≤7W

Working Temperature

-10°C to +55°C

Relative Humidity

10%RH-90%RH

Dimensions


200.5mm×136.5mm×22mm

Weight


0.8kg

VTH5222CH-S1

Dimensions

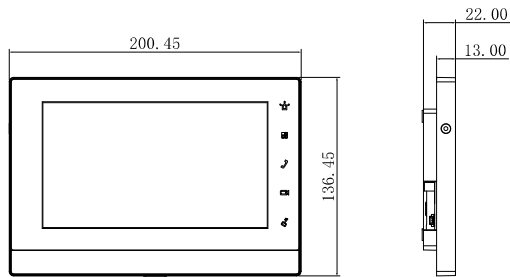

View Area

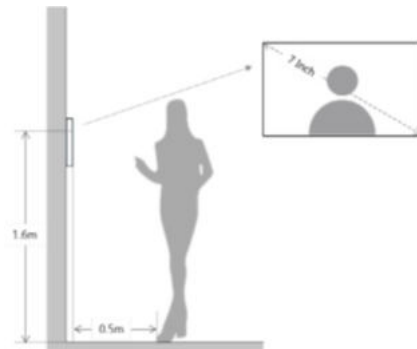

Application

- Use two wires to transmit both signal and power
- It is designed to replace existing analog system and make a full IP world

