

# JVS-ND7008-PD01(R2)


8CH H.265 PoE NVR



## Key features

- Adopt the new Vstar GUI , easy to operate and run smoothly
- Support intelligent coding VSMart, greatly reducing storage space
- Improved compatibility for hard disks, and up to 10TB
- Support Intelligent Detection and Human Detection
- Support face capture, face comparison, and efficient comparison of face information.
- Support face search by face, deduplication, and precise playback.
- Support full POE camera access, support 8POE + 8 non-POE access (a total of 16)

## Description

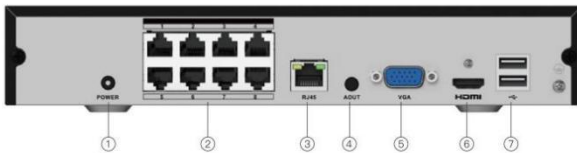

Index	Description	Index	Description
①	POWER	⑤	VGA
②	IEEE802.3af PoE	⑥	HDMI
③	RJ45	⑦	USB
④	Audio Out		

## Specifications

Model	JVS-ND7008-PD01
<b>Video and Audio</b>	
<b>IP Camera Input</b>	8CH PoE cameras upto 5MP+8CH Non-PoE cameras upto 5MP
<b>Audio Input/ Output</b>	1CH Output RCA; Audio output support HDMI
<b>Display</b>	
<b>Interface</b>	1 HDMI, 1 VGA
<b>Resolution</b>	HDMI: 3840x2160, 1920x1080, 2560x1440, 1440x900, 1280x1024, 1280x720, 1024x768 VGA: 1920x1080, 1440x900, 1280x1024, 1280x720, 1024x768
<b>Multi-screen Display</b>	Port binding 1/4/5/6/7/8/9 Non-port binding 1/4/5/6/7/8/9/10/11/12/13/14/15/16
<b>OSD</b>	Camera Name & Time, Recording, Alarm Detecting, Remote connection, Volume, Channel Number
<b>Recording</b>	
<b>Compression</b>	H.265/H.264
<b>Resolution</b>	10CH 5.0MP/4.0MP/1080P/960P/720P
<b>Record Mode</b>	Manual, Schedule, MD
<b>Video Detection and Alarm</b>	
<b>Trigger Events</b>	Recording, Snapshot, PTZ, Voice, E-mail, Client, Buzzer
<b>Video Detection</b>	Motion Detection, No Video Detection
<b>Playback and Backup</b>	
<b>Sync Playback</b>	2CH 5.0MP/ 3CH 4.0MP/ 4CH 3.0MP
<b>Search Mode</b>	Time /Date, Schedule, Motion Detection
<b>Playback Function</b>	Day View, Hour View, Back Step, Rewind, Pause, Play, Fast Forward, Slow, Step, Full Screen, Snap, Sound On/Off, Zoom
<b>Backup Mode</b>	USB Device/Network
<b>USB</b>	2x USB2.0
<b>Network</b>	
<b>Interface</b>	1 RJ-45 port (10/100/1000Mbps)
<b>PoE Interface</b>	8 Port 100Mbps IEEE802.3af PoE
<b>Network Function</b>	TCP/IP, DHCP, UDP, SMTP, NTP
<b>Smart Phone</b>	iPhone, Android
<b>Interoperability</b>	ONVIF 2.4
<b>Storage</b>	
<b>SATA</b>	1x SATA interface
<b>Capacity</b>	up to 10TB
<b>General</b>	
<b>Power Supply</b>	48V DC
<b>Consumption</b>	≤ 120 W (Without HDD)
<b>Working Temperature</b>	-10°C~ 55°C
<b>Working Humidity</b>	10 % ~ 90 %
<b>Dimensions</b>	260x219x45mm
<b>Weight</b>	≤ 1.05Kg (Without HDD)