

VE736

PIR motion sensor, 11 curtains & 1 curtain of 20 m & 60 m, V2E technology, CO Relay

Patented pyro & V2E signal processing

Unlike conventional sensors, our patented Vector pyro captures multi-dimensional signals, allowing it to not only detect the presence of a thermal source but also determine its direction of motion. This breakthrough technology enhances detection probability by combining optics resolution with the pyro's advanced output. Our VE series motion detectors incorporate as well Vector Verified Enhanced (V2E) signal processing, which analyzes and distinguishes different signal sources. False alarms caused by non-thermal sources or environmental factors like stationary thermal sources or strong light are therefore filtered out.

Optics

With our unique Step & Gliding focus mirror, we have a well-established reputation for producing effective volumetric motion sensors with multi-curtains that provide maximum coverage density and are easy to install. With the "High Density Optics" (HDO) mirror, the VE700 series have a comprehensive floor pattern, made by a wide-angle mirror featuring 11 high-density curtains over a 90° field-of-view, enhanced with a 60m long-range curtain. The VE700 is the only motion detector on the market that can offer this unique combination in a single product.

Chime & Settings

The VE700 has three sensitivity settings: Low, Standard and High. Sensitivity is set by selecting different modes for running the pattern recognition algorithms. The ex-factory setting is Standard, which ensures the best performance for most applications. The sensitivity level can be easily modified with a jumper. The pattern of the output vector of the VE700 pyro contains unique information about the origin of the source. That's why the DSP in the VE700 can recognise the direction in which the thermal source is moving. In other words, the VE700 allows you to determine the direction of the intruder across the surveillance area. When the chime mode is ON, the VE700 can trigger an alarm when an intruder walks from left to right and differentiate intruder movement from right to left, and vice versa.

Self-test & Plug-in electronics

All electronics of the VE700 are monitored constantly, in order to report the unlikely case of a defect. The plug-in concept ensures easy installation without any worry about damaging the sensor. All jumpers and switches are in the sub-frame, which means that setting any desired characteristic can be done conveniently in your hand.

Accessories

The VE710 laser alignment tool is the recommended tool to use during installation for aligning the sensors in long corridor applications. The SB01 swivel and mounting bracket can be used with the VE735.



Details

- Passive Infra Red motion sensor
- High density "Step & Gliding Focus Multi Curtain" mirror
- Plug-in electronics
- Sealed optics
- "Vector Verified Enhanced" detection algorithm
- Selectable range with full undercrawl detection
- On-site individual coverage pattern selection
- 3 alarm sensitivities
- No adjustment required for different mounting heights
- Tolerates wall angle deviation
- Pry-off and cover tamper
- Complies with EN50131-2-2
- Several European approvals

VE736

PIR motion sensor, 11 curtains & 1 curtain of 20 m & 60 m, V2E technology, CO Relay

Technical specifications

General

Technology	PIR
Application type	Wall mount
Anti masking	No
Pet immune	No
Camera	No
Pry-off tamper kit	On board

Detection

Max. detection range	60 m
Detection range selection	20 m or 60 m
No. of curtains	11
Coverage (field of view)	86°
Undercrawl protection	Yes
Alarm memory	Yes

Wired / wireless

Wired-wireless	Wired
----------------	-------

Inputs / outputs

Alarm relay characteristic	NO/NC (voltage free)
Tamper relay characteristic	NC when cover closed (voltage free)
Remote control lines	Day/Night, Walk test

Electrical

Operating voltage	9 to 15 VDC
Current consumption	11 mA (nom.)

Physical


Physical dimensions	93 x 175 x 66 mm (W x H x D)
Colour	White
Mounting height	1.8 to 3 m

Environmental

Operating temperature	-10° to +55° C
Relative humidity	95% relative humidity
Environment	Indoor

Regulatory

EN50131 grade	Grade 2
Certification	VdS

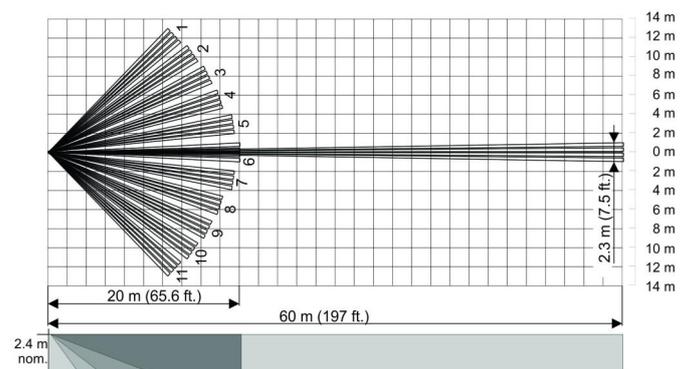

As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 6 June 2023 - 15:09