



DC408


Industrial floor mount contact for garage door, high security grade 3, grey

Requirements for grade 3 magnetic contacts

The grade 3 magnetic contacts are high security contacts which do meet the following requirements: preciseness of opening distance, magnet polarisation, strength of the magnet

Model with built in EOL resistors available

Though built in EOL resistors are not mandatory according to EN50131-2.6 requirements, Interlogix offers a model with built in EOL resistors for a quick installation (see how to Order information)

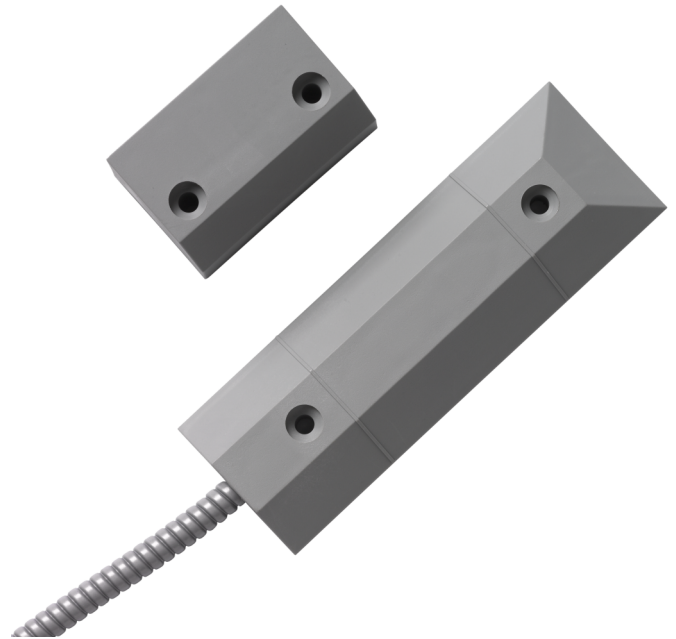

Details

- EN 50131-2-6 Grade 3 and VDS certified
- 2m cable
- Tamper protected

DC408

Industrial floor mount contact for garage door, high security grade 3, grey

Technical specifications

General

Application type	Surface Mount
Contact type	1 pin NC contact
Connectivity	LIYY 4 x 0.14 mm Cu tin-plated; Suitable for LSA IDC method of termination

Wired/wireless

Wired-wireless	Wired
----------------	-------

Electrical

Voltage	max 100V DC
Contact power	max 6W or 6 VA
Switching current	max 500mA
Contact resistance	max 0.15 Ohm

Physical

Physical dimensions	66 x 40 x 35 mm
Colour	Grey
Material	Polyamid GF
Dimensions magnet	12 x 55 mm
Dimensions contact / sensor	144 x 50 x 16.5 mm
Operating gap	34 mm

Environmental

Operating temperature	-25 to 70°C
Environment	VdS ; Class III - Outdoor (Sheltered)
IP rating	IP67

Standards & regulation

EN50131 grade	Grade 3
---------------	---------

